


模块电源

POWER MODULE


AC-DC/2-200W DC-DC/1-700W



模块电源制造专家 专业研发生产17年

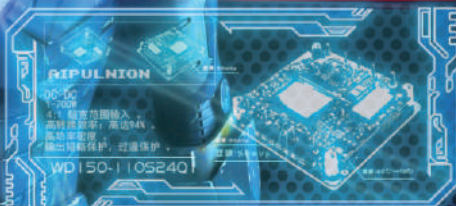



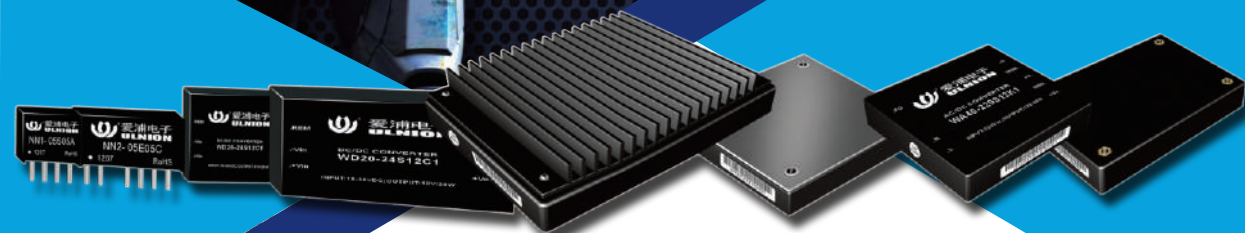










铸就钢铁般品质



广州市爱浦电子科技有限公司
GUANGZHOU AIPU ELECTRON TECHNOLOGY CO.,LTD

DC-DC 模块电源

DC-DC CONVERTER

产品图片 Picture	产品系列 Series	功率 Power	输入电压 I/P Voltage Range	输出电压 (Vdc) Output Voltage	输出 路数 No of Output	隔离电压 Isolation Voltage	工作温度 Operating Temperature	产品尺寸 Dimension
	UD6-A1	6W	18,36,72Vdc	5,12,15,24 ±5,±12,±15	单路 Single 双路 Dual	1500Vdc	-40℃~+85℃	25.4*25.4*12.0mm
	UD6-E3	6W	18,36Vdc	5,12,15,24 ±5,±12,±15	单路 Single 双路 Dual	1500Vdc	-40℃~+85℃	31.8*20.3*12.0mm
	UD10-B1	10W	18,36Vdc	5,12,15,24 ±5,±12,±15	单路 Single 双路 Dual	1500Vdc	-40℃~+85℃	50.8*25.4*12.0mm
	UD20-B1	20W	18,36,72Vdc	5,12,15,24	单路 Single	1500Vdc	-40℃~+85℃	50.8*25.4*12.0mm
	VD6-A1	6W	12,24,48,110Vdc	5,12,15,24	单路 Single	1500Vdc	-40℃~+85℃	25.4*25.4*12.0mm
	VD10-B1	10W	12,24,48Vdc	5,12,15,24 ±5,±12,±15	单路 Single 双路 Dual	1500Vdc	-40℃~+85℃	50.8*25.4*12.0mm
	FD10-A3	10W	18,36Vdc	5,9,12,15,24	单路 Single	1500Vdc	-40℃~+85℃	25.4*25.4*11.0mm
	WD40-H1	40W	12,24,48,110Vdc	5,12,15,24	单路 Single	1500Vdc	-25℃~+55℃	76.2*76.2*12.7mm
	WD50-K1	50W	12,24,48,110Vdc	5,12,15,24	单路 Single	1500Vdc	-25℃~+55℃	81.5*55.5*15.0mm
	WD75-M1	75W	12,24,48,110Vdc	5,12,24	单路 Single	1500Vdc	-25℃~+55℃	88.9*63.5*17.0mm
	WD150-N1	100-150W	12,24,48,110Vdc	5,9,12,24	单路 Single	1500Vdc	-25℃~+55℃	127.0*88.9*17.2mm
	WD150-Q1	100-150W	24,48,110Vdc	12,24	单路 Single	1500Vdc	-40℃~+100℃	61.0*57.9*12.7mm
	WD400-P1	200-400W	12,24,48,110Vdc	12,24	单路 Single	1500Vdc	-25℃~+55℃	139.0*88.0*23.5mm
	WD700-R1	350-700W	48Vdc	24,28	单路 Single	1500Vdc	-40℃~+100℃	116.84*0*61.0*12.7mm

因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Due to space limitations above is only a part of our product list, please contact with our sales team for more items.

AC-DC 模块电源

AC-DC CONVERTER

产品图片 Picture	产品系列 Series	功率 Power	输入电压 I/P Voltage Range	输出电压 (Vdc) Output Voltage	输出 路数 No of Output	隔离电压 Isolation Voltage	工作温度 Operating Temperature	产品尺寸 Dimension
	FA3-A2	3W	85-265Vac 120-380Vdc	5,9,12,15,24	单路 Single	4000Vac	-40℃~+75℃	37.5*18.5*16.5mm
	FA3-B	3W	85-265Vac 90-380Vdc	5,12,24	单路 Single	4000Vac	-40℃~+85℃	35.0*18.0*11.0mm
	FA5-Y2	5W	85-305Vac 120-430Vdc	5,9,12,24	单路 Single	4000Vac	-40℃~+75℃	50.8*25.4*15.16 mm
	FA5-B	5W	85-305Vac 90-400Vdc	5,9,12,15,24	单路 Single	4000Vac	-40℃~+85℃	42.0*20.0*13.65 mm
	FA6-D2	6W	85-265Vac 120-380Vdc	5,9,12,15	单路 Single	3750Vac	-25℃~+65℃	39.0*25.0*22.0 mm
	FA10-E2	10W	85-265Vac 120-380Vdc	5,9,12,15,24	单路 Single	4000Vac	-40℃~+75℃	55.0*45.0*20.5 mm
	FA15-E2	15W	85-265Vac 120-380Vdc	5,12,15,24	单路 Single	3800Vac	-40℃~+75℃	55.0*45.0*20.5 mm
	FA30-H2	30W	85-265Vac 120-380Vdc	5,9,12,15,24	单路 Single	4000Vac	-40℃~+75℃	70.0*48.0*23.5 mm
	FA40-H3	40W	85-265Vac 120-380Vdc	5,9,12,24	单路 Single	3750Vac	-40℃~+75℃	70.0*48.0*30.0 mm
	UA2-B	2.5W	85-305Vac 90-430Vdc	5,12,15,24	单路 Single	2500Vac	-40℃~+85℃	32.0*15.0*12.0 mm
	UA3-A2	3W	90-265Vac 120-375Vdc	5,9,12	单路 Single	3750Vac	-25℃~+65℃	37.5*18.5*13.5mm
	UA5-C2	5W	85-265Vac 120-380Vdc	+5, +12 +5, +5 +5, +24	双路 Dual	4000Vac	-25℃~+65℃	48.5*36.0*20.5 mm
	UA20-F2	15-20W	85-265Vac 120-380Vdc	+5, ±12 +5, ±15 +5, ±24	三路 Triple	3000Vac	-25℃~+75℃	62.0*45.0*22.5 mm
	UA20-H2	20W	85-265Vac 120-380Vdc	+5, ±12 +5, ±15 +5, ±24	三路 Triple	3000Vac	-25℃~+75℃	70.0*48.0*23.5 mm
	WA75/100-L1 NA150-L1	75-150W	100-265Vac 140-380Vdc 165-265Vac 200-380Vdc	12,24	单路 Single	2500Vac	-25℃~+65℃	127.0*88.9*17.2mm
	NA200-M1	200W	165-265Vac 200-380Vdc	12,15,24	单路 Single	2500Vac	-25℃~+65℃	139.0*88.0*23.5mm

因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Due to space limitations above is only a part of our product list, please contact with our sales team for more items.

微功率 模块电源

DC-DC CONVERTER


产品图片 Picture	产品系列 Series	功率 Power	输入电压 I/P Voltage Range	输出电压 (Vdc) Output Voltage	输出 路数 No of Output	隔离电压 Isolation Voltage	工作温度 Operating Temperature	产品尺寸 Dimension
 	NN1-05S05A	1W	5	5	单路 Single	1500Vdc	-40°C~+85°C	11.5*6.0*10.0mm
	K78	500mA 1000mA	(4.75 – 28) (6.5 – 32) (11 – 32) (15 – 32) (18 – 32)	5, 9, 12, 15	单路 Single	/	-40°C~+85°C	11.6*7.5*10.2mm 11.5*9.0*17.1mm
	KW1-E	1W	5, 12, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	1500Vdc	-40°C~+85°C	22.0*9.5*12.0mm
	KW1-E3	1W	5, 12, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	3000Vdc	-40°C~+85°C	22.0*9.5*12.0mm
	KW3-E	3W	5, 12, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	1500Vdc	-40°C~+85°C	22.0*9.5*12.0mm
	KW3-E3	3W	5, 12, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	3000Vdc	-40°C~+85°C	22.0*9.5*12.0mm
	NN1-AN	1W	5, 9, 12, 15, 24Vdc	5, 9, 12, 15, 24	单路 Single	1500Vdc	-40°C~+85°C	11.5*6.0*10.0mm
	NN1-B3N	1W	5, 9, 12, 15, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	3000Vdc	-40°C~+85°C	19.5*6.0*10.0mm
	NN1-BN	1W	5, 9, 12, 15, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	1500Vdc	-40°C~+85°C	19.5*6.0*10.0mm
	NN1-H6	1W	5, 12, 15, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	6000Vdc	-40°C~+85°C	19.5*9.8*12.5mm
	NN2-C3N	2W	5, 9, 12, 15, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	3000Vdc	-40°C~+85°C	19.5*7.0*10.0mm
	NN2-CN	2W	5, 9, 12, 15, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	1500Vdc	-40°C~+85°C	19.5*7.0*10.0mm
	NN2-H6	2W	5, 12, 24Vdc	5, 9, 12, 15, 24 ±5, ±9, ±12, ±15	单路 Single 双路 Dual	6000Vdc	-40°C~+85°C	19.5*9.8*12.5mm
	NW1-B	1W	5, 9, 12, 24Vdc	5, 9, 12, 15, 24	单路 Single 双路 Dual	1000Vdc	-40°C~+85°C	19.5*6.0*10.0mm
	NW1-B3	1W	5, 9, 12, 24Vdc	5, 9, 12, 15, 24	单路 Single 双路 Dual	3000Vdc	-40°C~+85°C	19.5*6.0*10.0mm
	NW2-C	2W	5, 12, 24Vdc	5, 9, 12, 15, 24	单路 Single	1000Vdc	-40°C~+85°C	19.5*7.0*10.0mm
	NW2-C3	2W	5, 12, 24Vdc	5, 9, 12, 15, 24	单路 Single	3000Vdc	-40°C~+85°C	19.5*7.0*10.0mm

因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Due to space limitations above is only a part of our product list, please contact with our sales team for more items.







铃流 模块电源

RINGING GENERATOR

产品图片 Picture	产品系列 Series	功率 Power	输入电压 I/P Voltage Range	输出电压 Output Voltage	输出 路数 No of Output	隔离电压 Isolation Voltage	工作温度 Operating Temperature	产品尺寸 Dimension
	WR20	20W	24,48Vdc	75	单路 Single	500Vdc	-25℃~+55℃	76.2*76.2*13.9mm

充电桩 模块电源

POWER MODULE FOR CHARGING-PILE

产品图片 Picture	产品系列 Series	功率 Power	输入电压 I/P Voltage Range	输出电压 (Vdc) Output Voltage	输出 路数 No of Output	隔离电压 Isolation Voltage	工作温度 Operating Temperature	产品尺寸 Dimension
	FA10-E2	10W	85-265Vac 120-380Vdc	12	单路 Single	4000Vac	-40℃~+75℃	55.0*45.0*20.5 mm
	FA20-H2	20W	85-265Vac 120-380Vdc	+5, ±12	三路 Triple	3750Vac	-40℃~+75℃	70.0*48.0*23.5 mm
	FA25-H2	25W	85-265Vac 120-380Vdc	12	单路 Single	3800Vac	-40℃~+75℃	70.0*48.0*23.5 mm
	FA40-W2	40W	85-265Vac 120-380Vdc	12	单路 Single	4000Vac	-40℃~+75℃	89.0*63.5*25.0 mm
	UA15-F2	15W	85-265Vac 120-380Vdc	+5, ±12	三路 Triple	4000Vac	-25℃~+65℃	62.0*45.0*22.5 mm
	UA25-H2	25W	85-265Vac 120-380Vdc	+5, ±12	三路 Triple	4000Vac	-25℃~+65℃	70.0*48.0*23.5 mm

因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Due to space limitations above is only a part of our product list, please contact with our sales team for more items.

▶ 资质证书
Certification



ISO-9001-2008
质量管理体系认证
ISO-9001-2008
Quality Management
System Certification



高新技术企业证书
Hi-tech enterprise certificate



AC/DC产品CE认证
AC/DC Product CE Certification




DC/DC产品CE认证
DC/DC Product CE Certification



DC/DC产品RoHS认证
DC/DC Product RoHS Certification



微功率产品RoHS认证
1-2W DC/DC Product RoHS Certification



AC/DC产品SGS认证
AC/DC Product SGS Certification



DC/DC产品SGS认证
DC/DC Product SGS Certification



发明专利证书(部分)
Certificate of Invention patent



实用新型专利证书(部分)
Certificate of Utility Model patent

官网/web:www.aipulnion.com

ООО “ЭНТех”
entehooo.ru
office@entehooo.ru